


CONTINUOUS HYBRID REACTOR

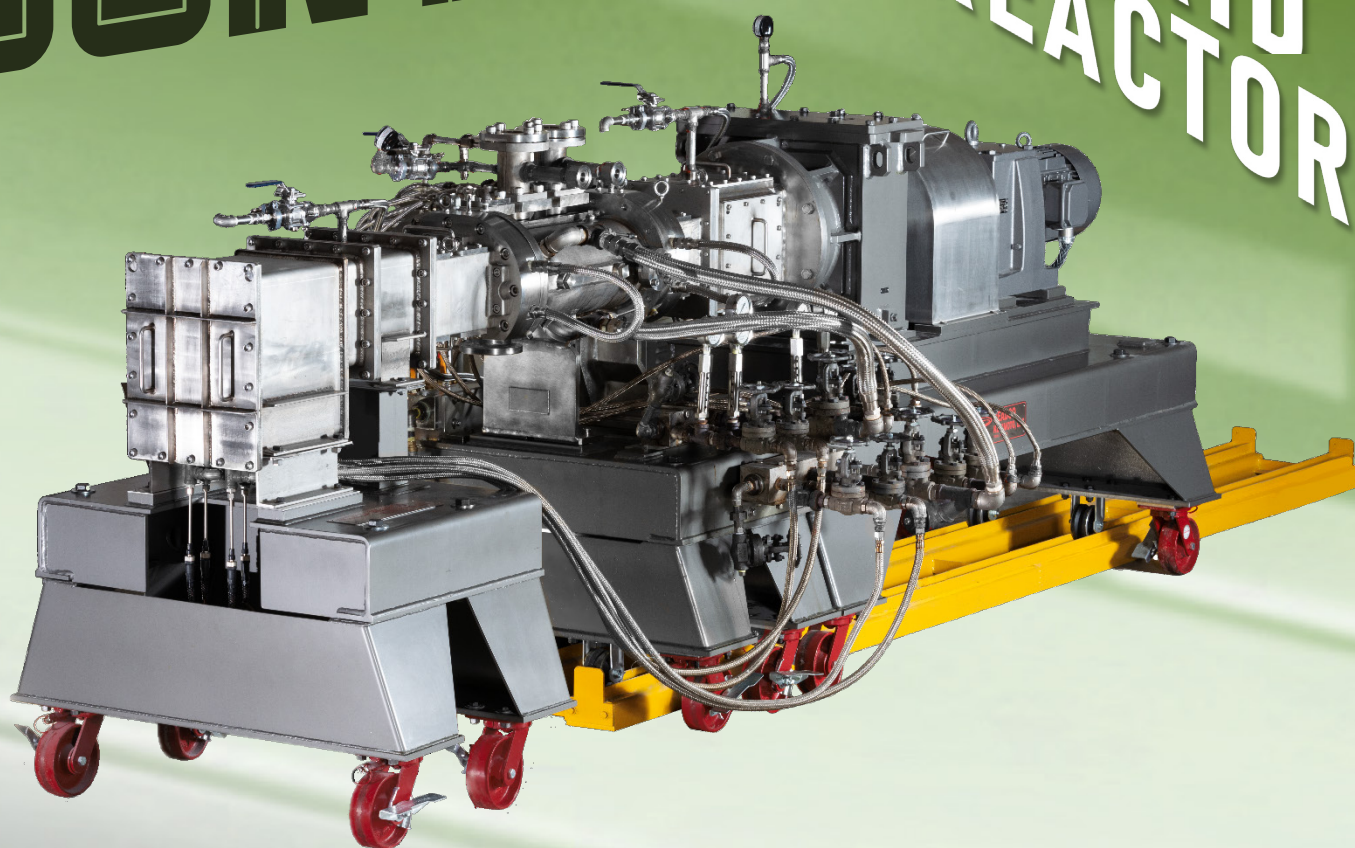

THE CH REACTOR FROM READCO KURIMOTO, LLC

HIGH VOLUME | CONTINUOUS REACTIONS | HIGH HEAT PROCESSING
VACUUM DRYING | HIGH VISCOSITY | SELF WIPING

CH REACTOR

What is it?

The CH Reactor is an enhanced piece of processing equipment that can create an inert environment, or use high vacuum, heating or cooling and mixing to facilitate chemical reactions. The improved heat transfer and mass transfer (mixing) increases the process efficiency, yield and quality of products at a much smaller footprint compared to conventional batch reactors. Smaller reaction volume can offer safety for highly reactive or unstable processes.

What does it do?


- Polymerization
- Slow and Fast Reactions
- Drying
- Degassing
- Evaporation
- Steam Stripping
- Solvent Removal & Recovery

How does it do it?

- High Temperature Rated Construction
- High Vacuum Capability
- Efficient Mixing
- Increased Residence Time
- Varying Paddle Configuration
- Indirect and/or Direct Heat Transfer


Benefits

- Processing Temperature and Oxygen Sensitive Materials
- Consistency, no Batch to Batch Variation
- Processing High Viscosity Material
- Easy to Clean & Maintain
- Easy Process Automation
- Plug Flow Characteristics
- Safe Operation
- Self-Wiping
- Reduced Waste

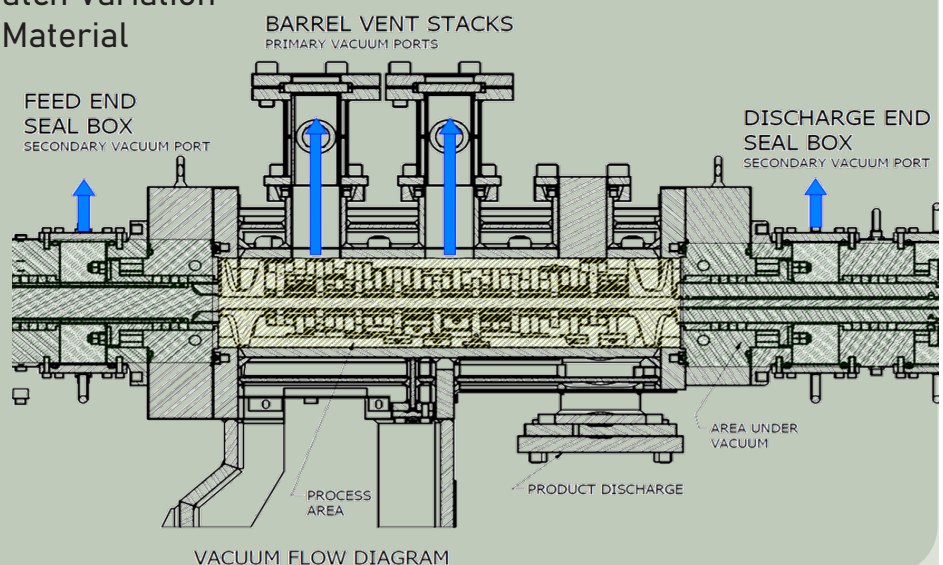

THE FLOW SHEET OF CONTINUOUS REACTIONS AND DRYING UNDER VACUUM



HOW DOES IT WORK?

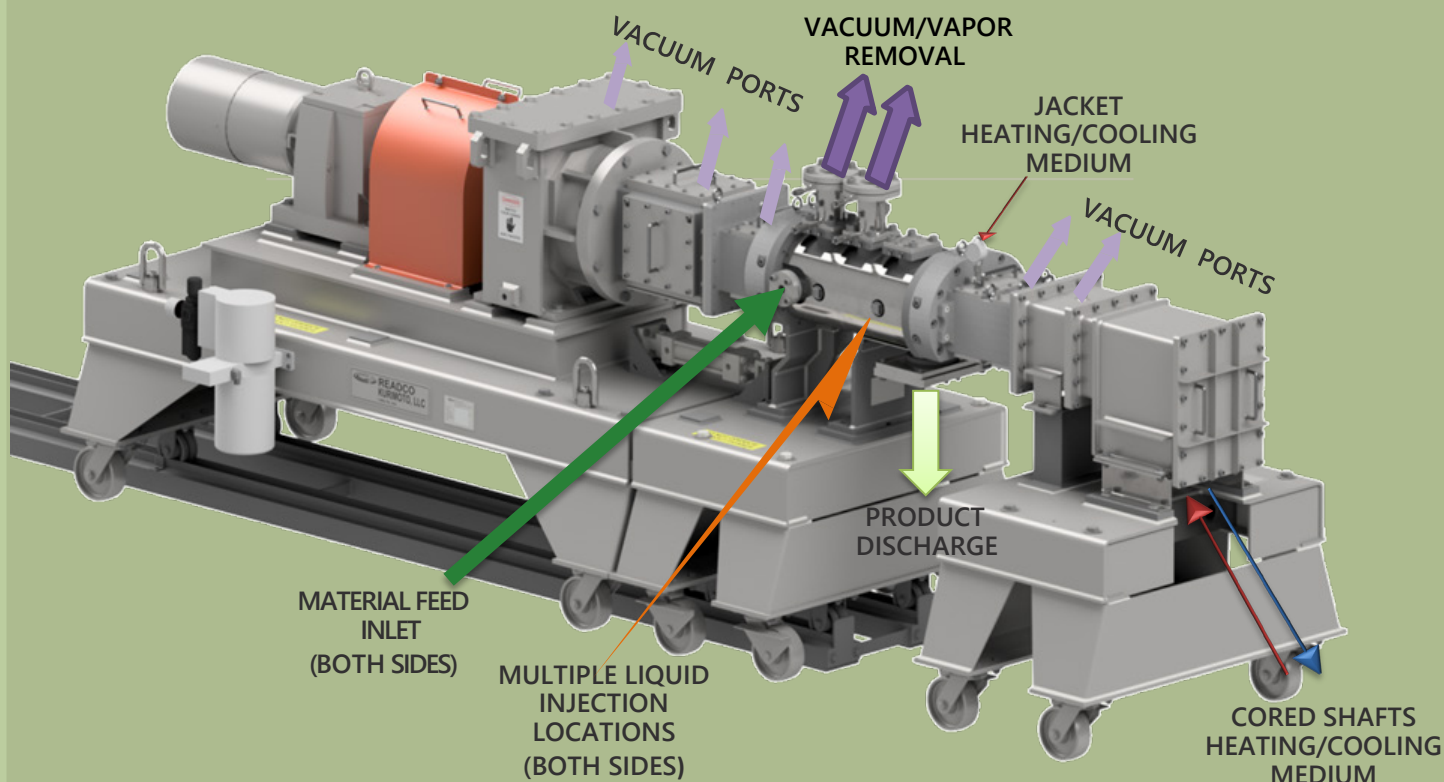


In the CH Reactor, chemical reactions are run continuously under vacuum or in an inert environment. Primary reactants, catalysts and other reagents are fed through the side feed ports and injection ports distributed along the barrel. Once inside, the chemical reaction is initiated and enhanced by mixing and heat. A deep vacuum draw acts upon the material to remove any by-products, volatiles and particulates formed during the reaction. The vapors can then be filtered, condensed and collected for reuse or disposal. The CH Reactor offers better control over reaction conditions including heat transfer, residence time and mixing intensity to produce repeatable chemical reactions.

What Does It Do?


- Transforms slurries or solutions into powder or flake
- Reclaims liquids through evaporation or distillation
- Facilitates chemical reactions, crystallizations, and polymerizations, producing paste or slurry
- Flexible paddle arrangements to suit a variety of applications

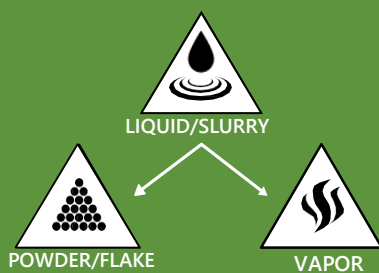

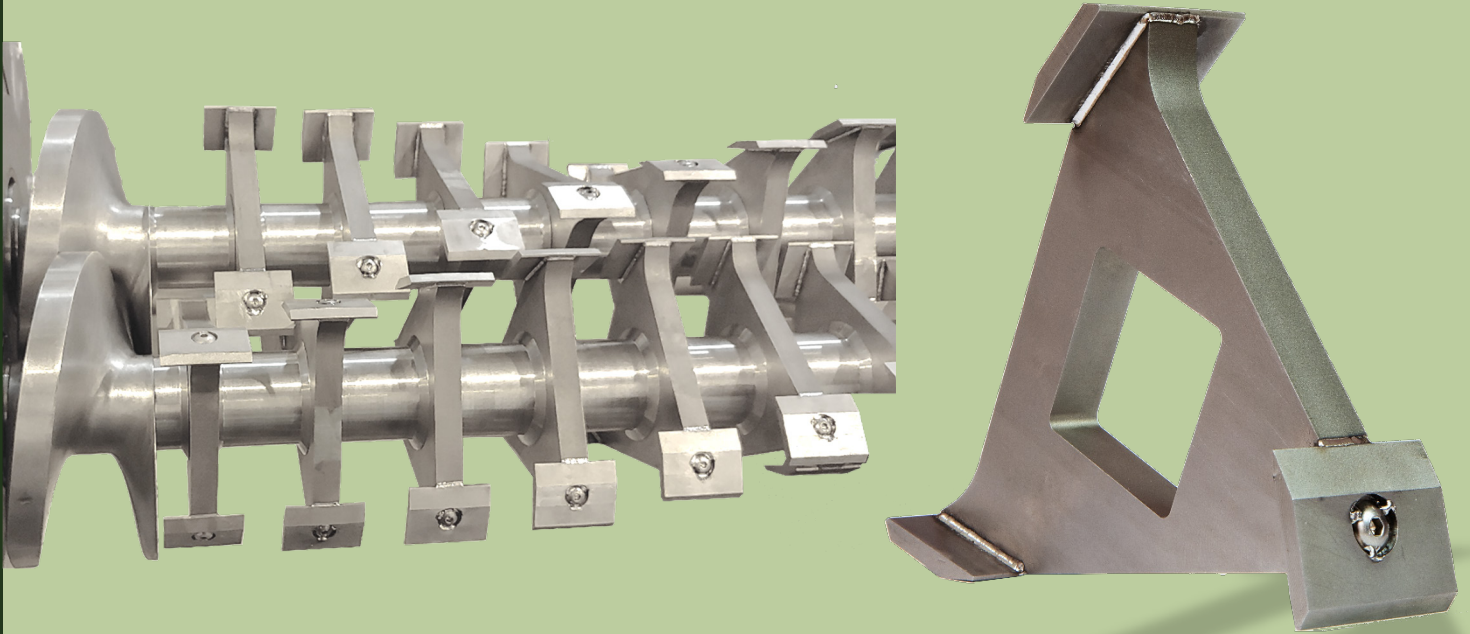

Features

- Removeable Shafts, with Minimal Disassembly
- One-Piece Stainless Steel Barrel Construction
- ASME Rated Barrel Jacket
- Co-rotating Cored Shafts
- Multiple Vacuum Ports

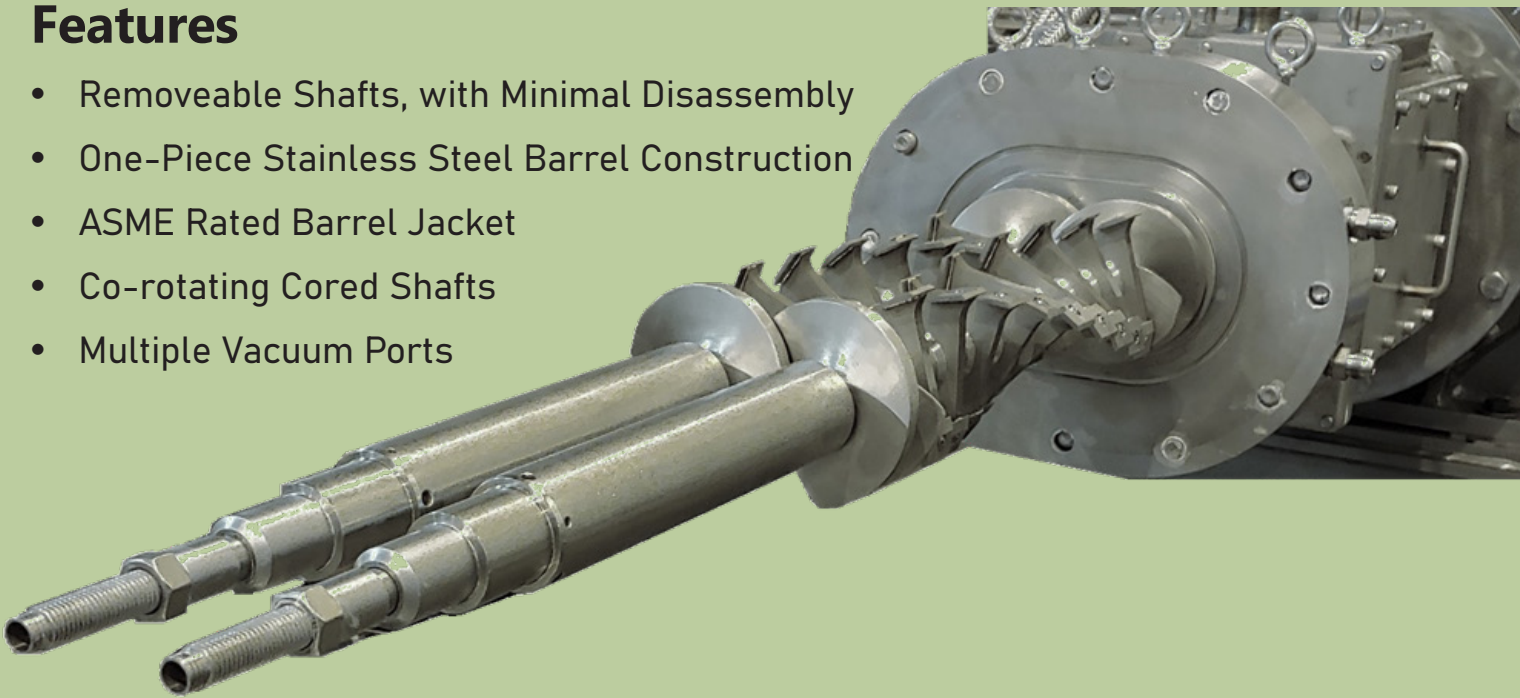

Additional Options Include:

Mechanical Options

- Variable Speed Drive
- Hydraulic, Pneumatic, or Electronic Slide System

Design Options

- Precise Automated Controls – LIW (Loss In Weight)
- HMI Touchscreen Controls
- Electrical Classification (up to Class I Div I)
- CE Compliant

APPLICATIONS

Specialty & Fine Chemicals

Polyester
Acrylic Resins
Polyamide Resins
Vinyl Acetate Resins
Polylactic Acid (PLA)
Polycarbonate Resins
Polybutylene Terephthalate
Super Absorbent Polymer (SAP)
Styrene-Butadiene Rubber (SSBR)

Monomer Removal & Devolatilization

Special Olefin Series
Polystyrene
Polyethylene
Polyethylene Terephthalate (PET)

Edible Polymers



Polycondensation of

Dehydrating


Pharmaceutical
Food Drying

READCO CONTINUOUS HYBRID REACTOR SPECIFICATIONS

PADDLE DIAMETER (IN)	L/D (SCREW LENGTH/DIA.)	A (IN)	B (IN)	C (IN)	D (IN)	E (IN)	INTERNAL VOLUME (FT ³)	HEAT TRANSFER AREA (FT ²)
1	4.5	56	30	50	36	46	0.004	0.18
4	4.5	213	48	152	35	53	0.3	3.21
10	4.5	295	59	217	38	59	2.9	14.4
15	4.5	391	75	302	42	69	9.6	32.4
20	4.5	591	87	375	49	85	22.8	57.6
30	4.5	787	118	591	67	106	77.0	129.6
40	4.5	886	128	669	75	118	182.6	230.3
55	4.5	984	138	787	83	130	474.7	435.5
70	4.5	1083	148	886	91	138	978.6	705.4

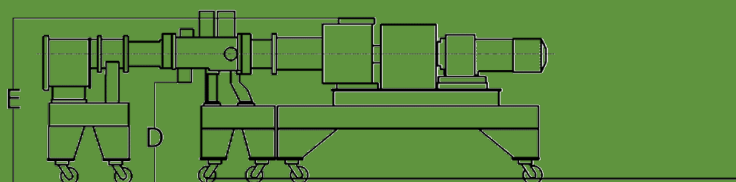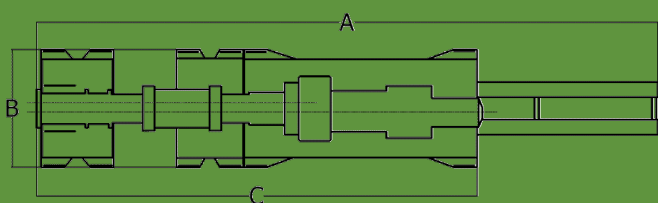

CONTINUOUS HYBRID REACTOR

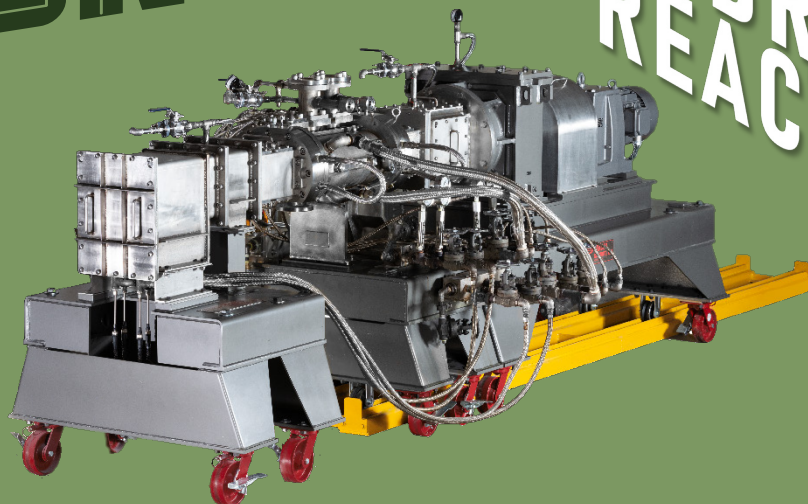

Talk to your Readco Kurimoto, LLC sales engineer about our flexible laboratory that can help to determine the proper CH Reactor configuration and size required for efficient and consistent production of your product. Our laboratory is equipped with a variety of feeders, pumps, temperature controllers, and other miscellaneous equipment; to accommodate materials with varying physical states and properties.

| CONTACT US |

READCO KURIMOTO, LLC

550 N. State Street
York, PA 17403 USA


TEL: 717-848-2801

TEL: 800-395-4959

FAX: 717-848-2811

www.readco.com



 Engineered and Built in the United States of America.